

UV-LED Light Source

Ark



- ① LED head connection part 1CH ~ 4CH
- ② LED ON monitor
- ③ TIMER MODE selector switch
- ④ LOCAL / REMOTE selector switch
- ⑤ Batch irradiation ON / OFF switch
- ⑥ DOWN switch timer time
- ⑦ UP switch timer time
- ⑧ Timer time / luminance setting selector switch
- ⑨ Main switch
- ⑩ REMOTE I / O (25pin)
- ⑪ PLC I / O (25pin)
- ⑫ DC IN 24V
- ⑬ Individually irradiation switch

Main Specifications



- LED Driver unit: 1-4 head enabled
 - : Input voltage: DC24V
 - : Emission center wavelength: 365nm
- LED ON / OFF function : Remote local
- Light intensity adjustment function : Manual
- Not lighting alarm

Characteristic

- Lightweight, compact
- Function was suppressed to the minimum.
- (When used four) Power Consumption 24W or less
- Can be selected for the irradiation area by the lens exchange of the tip.
- Was consistent with the use conditions of our customers and are available upon optical lens design.

Option

- AC / DC power adapter
- Irradiation area for changing the lens
- PLC-board

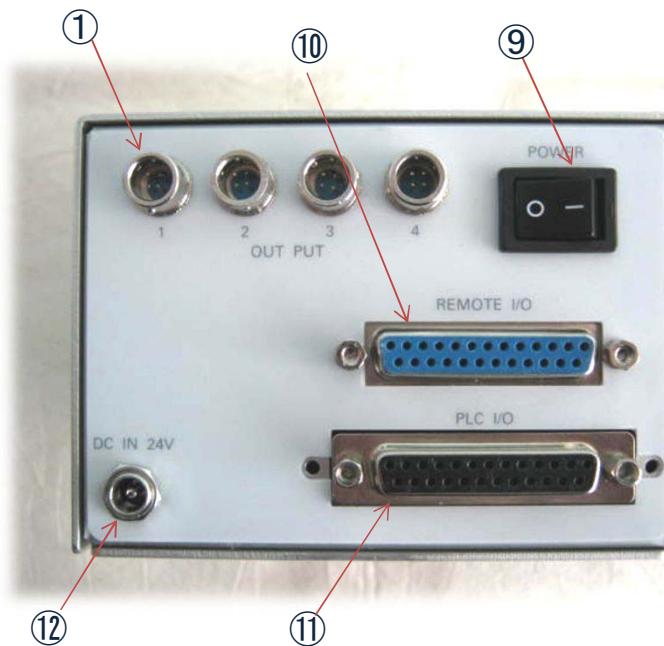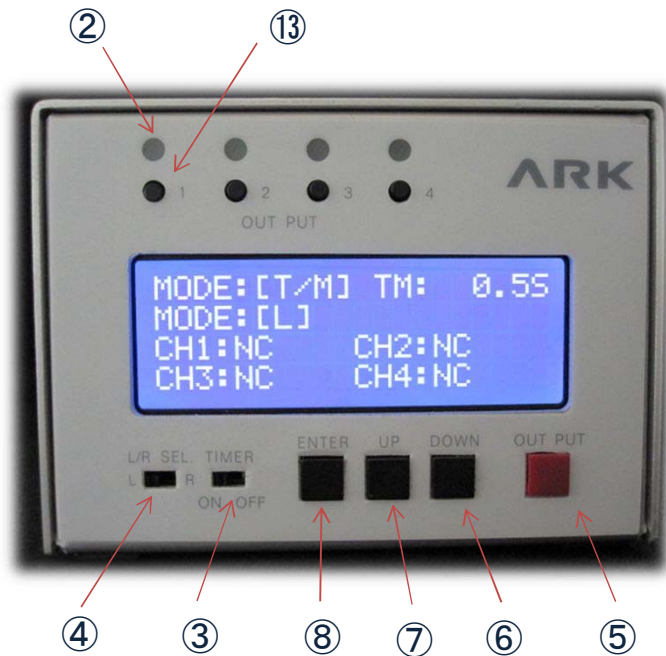

LED head
(With cable, 1500mm) 1 ~ 4 lines

